



XI'AN LIB ENVIRONMENTAL SIMULATION INDUSTRY

Climatic Test Chamber Manufacturer and Supplier

UV Test Chamber





Test Chamber [Application]

UV test chamber is equipped with fluorescent UV lamp which can simulate the UV spectra of sunlight, exposes materials to alternating cycles of UV light, moisture and temperature at controlled.

It simulates dew and rain with condensing humidity and/or water spray.

Test Chamber [Standard Features]

- Fluorescent UV lamps (8) - 40 W
- Black Panel Temperature (BPT) at controlled, BPT 30~70°C
- Temperature from Ambient to 90°C
- Spraying water, automatic water supply
- Water reservoir 50 Liter
- Can hold 48 pieces of specimens
- Programmable color display touch screen controller
- Safety protection system
- Easy to mount samples on the holders
- CE and RoHS compliance

Test Chamber [Technical Parameter]

Model	UV-260	UV-SI-260
Internal dimensions (mm) - D*W*H	450*1170*500	450*1170*500
Overall dimensions (mm) - D*W*H	680*1300*1500	680*1300*1500
Capacity of test specimens	48 pieces Individual specimen size is 75mm *150mm	48 pieces Individual specimen size is 75mm *150mm
Controller	Programmable color display touch screen controller Ethernet interface, PC link	Programmable color display touch screen controller Ethernet interface, PC link
Temperature range	Ambient~90°C ±2°C	Ambient~90°C ±2°C
Humidity range	≥95%R.H ±2%R.H	≥95%R.H ±2%R.H
Black Panel Temperature	30~80°C	30~80°C
Irradiation Source	Fluorescent UVA-340 lamps (8) - 40 W	Fluorescent UVA-340 lamps (8) - 40 W
UV wavelength	290 ~ 400nm	290 ~ 400nm
Irradiance Control	N/M	0.3 ~ 20 W/m ²
Water Spray	Spraying water	Spraying water
Distance of Specimen and lamp	50mm	50mm
Nominal power	5500W	5500W
Power Supply	380V 50HZ	380V 50HZ



Test Chamber [Design and Construction]

● **Irradiation Source - UV Lamp**

Equipped with 8 pieces of fluorescent UV lamps, which is air-cooled

Each UV Lamp Power is 40W.

UV lamp service life is 1200hours.

Lamp length: 1160mm



● **Specimen Holders**

Flat Specimen Holders, aluminum panels with rings.

Each specimen size is 75mm * 150mm, can hold 48 pieces of specimens.

Option: Special Specimen Holder

Customize special holder according to different specimens.



● **Spraying Water**

Total 10 water spray nozzles, 5 nozzles each side.

Automatic water supply.

Water reservoir is 50 Liter.



● **Sensors**

UV Irradiance Radiometer

Temperature sensor: PT-100 A class

Humidity sensor: Dry and wet bulb sensors

● **Control Panel**

Programmable color display touch screen controller

Measure and display temperature, humidity, water spraying,

black panel temperature and irradiance.

Show status and working time of 8 UV lamps.



● **Safety Protection**

Humidifier dry-combustion protection

Over-temperature protection

Water shortage protection

Over-current protection

Earth leakage protection

● **Power Supply and Wiring**

380V, 50 Hz 10% +/- Three-phase five little system



Packing & Shipping

- Package with Export Standard Wooden Box
- Can be used for Sea, Air, Railway, Truck transportation.



Installation

- Environment conditions

Temperature: 5 °C --35 °C , Relative humidity: ≤85%,

pressure: 86kPa—106 Kpa

- Space conditions


Chamber shall be installed on flat floor, with good ventilation

No combustible material, explosive material or strong vibration around.

No direct sunlight or other heat sources direct radiation.

No strong airflow around.

No strong electric field around.

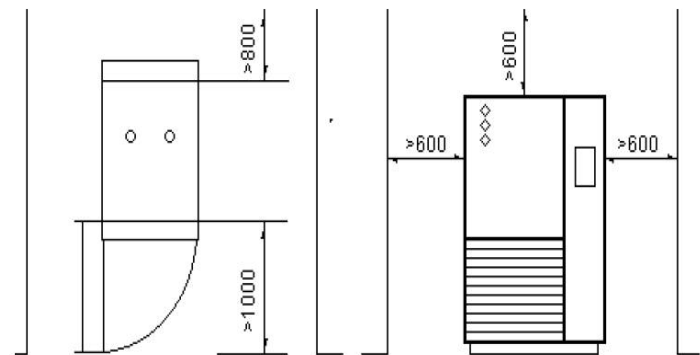

Warranty & After -sales Service

3 Years Warranty, Lifelong Follow-up Services.

Training how to install and operate the machine.

Training how to maintain the machine.

Response within 24 hours once got questions from customers.

Send spare parts within 2 days after got notice.

Engineers available to service machines overseas to install and commissioning.




Xi'an LIB environmental simulation industry is a manufacture and exporter of climatic test chambers in China, and have over 8 years overseas market in test chambers to more than 25 countries.

We provide various climatic chambers and service to accredited laboratories, manufacturing industry, institute, university, companies and other partners. And got testimonials from many of our esteemed companies.

To provide better service for customers, we have assembled a team of experienced and motivated people to provide service as

- An extensive range of standard and custom climatic test chambers
- Services, Maintenance & Calibration for all kinds of environmental chambers
- Provide test solutions

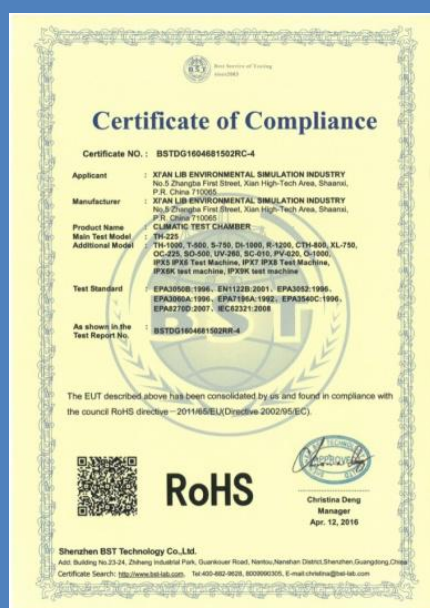

Xian LIB Environmental Simulation Industry

www.lib-industry.com/

Add: No.5 Zhangba First St, Xian High-Tech Area, Shaanxi Province P.R.China 710065

Tel: +86 29 68918976

Skype: wendy.lib

Email: wendy@lib-industry.com ; sales@lib-industry.com